

Accurate color transmission
and quality control



Φ 8 & Φ 4mm dual
measuring apertures



USB/Bluetooth®



Long life LED
light sources



Concave Grating

ISO 9001
Certified




YS4560Plus-Spectrophotometer

YS4560Plus Advanced Spectrophotometer uses 45/0 (45 degree ringillumination, 0 degree reception) geometric optical structure in accordance with CIE No. 15 and adopts concave grating spectrometry to accurately measure sample reflectance and various colorimetric data; The instrument is equipped with Φ 8, Φ 4mm double measuring aperture, used for traffic signs and accurate color measurement and quality control in various industries. It has a separate UV source for fluorescence sample measurements.



APPLICATION INDUSTRIES

The grating spectrophotometer can easily achieve the accurate transmission of color, and can also be used as the detection equipment of the accurate color matching system; it is used for accurate color measurement and quality control of traffic road signs, plastics, electronics, paint and ink, textile and garment, printing and dyeing, ceramics and other industries. The instrument has a separate UV light source for fluorescent sample measurements.



Traffic road sign



Automobile



Plastics



Paint



Food stuff



Laboratory



Others


PRODUCT FEATURES

- 1.Beautiful appearance and perfect combination with ergonomic structure design.
- 2.Built-in standard polygon tolerance setting and specific traffic sign gamut, one button to realize the measurement of traffic road signs, marking lines, reflective film brightness factor and chromaticity coordinates.
- 3.Conforms with CIE No.15, GB/T 3978,GB 2893,GB/T 18833,ISO7724/1,ASTM E1164,DIN5033 Teil7.
- 4.High electronic hardware configuration: 3.5-inch TFT color LCD,Capacitive Touch Screen, concave grating, 256 Image Element Double Arrays CMOS Image Sensor.
5. Measure sample spectra, accurate Lab data , can be used in color matching and accurate color transmission.
- 6.Adopt high-life and low-power combined LED light source, including UV/excluding UV.
- 7.The instrument is equipped with ϕ 8mm and ϕ 4mm aperture(optional ϕ 10 mm and ϕ 5mm) suitable for more tested samples.
- 8.Large capacity storage space, over 30,000 measurement data.
- 9.USB / Bluetooth dual communication mode, more adaptable.
- 10.PC software has a powerful function extension.



OPTIONAL ACCESSORIES

The instrument is equipped with various accessories; Such as micro printer, powder test box, etc.; Meet the needs of more measurement samples.

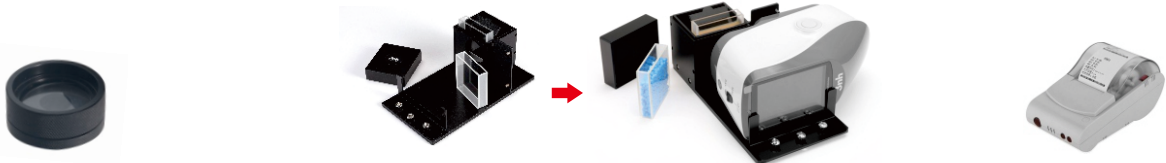

Powder test box: Easy to use, focusing on powdered target measurement.

Multifunctional test components: can be used to test liquid reagents, sauces (such as ketchup, paint), powders (such as coffee/Brown), color masterbatch, etc.

Micro printer: easy to carry, without computer can continuously print out the measurement of various parameters, easy to save.

SPECIFICATION PARAMETERS

Model: YS4560PLUS

Illumination: 45/0(45 circular illumination, vertical viewing)

Standard: CIE No.15, GB/T3978,GB2893,GB/T 18833,ISO7724-1,ASTM E1164,DIN5033Teil7

Integrating Sphere Size: 48mm

Light Source: Combined LED Light,UV Light

Spectrophotometric Mode: Concave Grating

Sensor: 256 Image Element Double Array CMOS Image Sensor

Wavelength Range: 400-700nm

Wavelength Interval: 10nm

Semiband Width: 10nm

Measured Reflectance Range: 0-200%

Measuring Aperture: MAV: ϕ 8mm/ ϕ 10mm; SAV: ϕ 4mm/ ϕ 5mm

Observer Angle: 2°/10°

Color Space: CIELAB,XYZ,Yxy,LCh,CIELUV,sRGB,HunterLab, β xy,DINLab99, Munsell(C/2)

Color Difference Formula: ΔE^*ab , ΔE^*uv , ΔE^*94 , $\Delta E^*cmc(2:1)$, $\Delta E^*cmc(1:1)$, ΔE^*00 , DIN $\Delta E99$, ΔE (Hunter)

Other Colorimetric Index: Spectral reflectance, whiteness (ASTM E313-00, ASTM E313-73, CIE/ISO, AATCC, Hunter, Taube-Berger-Stensby), yellowness (ASTM D1925, ASTM E313-00, ASTM E313-73), metamerism index Mt, colorfastness to crocking, colorfastness to light, strength (dye strength, tinting strength), opacity, 555 hue classification, blackness (My, dM), color density CMYK, Tint (ASTM E313-00), color density, Munsell (some functions are implemented through a host computer).

Illuminant: D65,A,C,D50,D55,D75,F1,F2,F3,F4,F5,F6,F7,F8,F9,F10,F11,F12,CWF,DLF,TL83,TL84,TPL5,U30,B,U35,NBF,ID50,ID65,LED-B1,LED-B2,LED-B3,LED-B4,LED-B5,LED-BH1,LED-RGB1,LED-V1,LED-V2,LED-C2,LED-C3,LED-C5(a total of 41 types of light sources,some of which are implemented through a host computer).

Displayed Data: Spectrogram/Values, Samples Chromaticity Values, Color Difference Values/Graph, PASS/FAIL Result, Color Offset

Software support: Android,iOS,Windows,WeChat Mini Program,HarmonyOS

Measuring Time: 1.5s

Repeatability: Spectral reflectance: MAV, standard deviation within 0.08%(400~700nm: within 0.18%)

Chromaticity value: MAV, within ΔE^*ab 0.03(After calibration, measure the average value of the white board 30 times each 5S.)

Inter-instrument agreement: MAV, within ΔE^*ab 0.15(Average value for 12 BCRA series II color tiles)

Battery: Li-ion battery. 5000 measurements within 8 hours

Dimension: L*W*H=184*77*105mm

Weight: 600g

Illuminant Life Span: 5 years, more than 3 million times measurements

Display: 3.5-inch TFT color LCD, Capacitive Touch Screen

Data Port: USB/Bluetooth dual mode (compatible with 2.1)

Data Storage: Standard 1000 Pcs, Sample 30000 Pcs

Language: Simplified Chinese, English, Traditional Chinese, Russian, Italian, German, Portuguese, Spanish, French

Operating Environment: 0~40°C, 0~85%RH (no condensing), Altitude < 2000m

Storage Environment: -20~50°C, 0~85%RH (no condensing)

Standard accessories: power adapter, data line, built-in lithium batteries, instructions, quality control software (download from official website), black and white calibration board, protection cover, polarization filter box(Optional accessories: Micro printer, Powder test box, multi-functional test component,)

GUANGDONG THREENH TECHNOLOGY CO., LTD.



Spectrophotometers



Colorimeters



Haze Meters



Gloss Meters



Test Charts



Light Booths

★ CONTACT US

web:www.3nh.com

Email:3nh@3nh.com

Tel:0086-020-82880288

Add: 6-8th floors, Building B33, Low Carbon Headquarters Park, Xincheng Road No.400, Zengcheng District, Guangzhou, Guangdong Province, China